


Rubber-Expansion-Joint Type 130 G



Operating pressure: at 20° up to **16 bar**, on **80°C** up to **10 bar**.

Construction: highly flexible rubber bellows with flat convolution
Core/Cover = Hypalon (CSM) Reinforced with Nyloncord

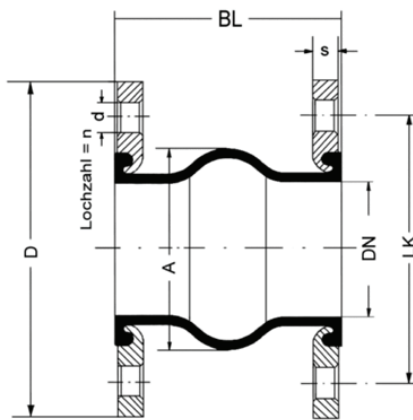

| DN | BL | + axial | - axial | +/- lateral | angular |
|-----|-----|---------|---------|-------------|---------|
| 25 | 130 | 9 | 13 | 14 | 15° |
| 32 | 130 | 12 | 20 | 14 | 15° |
| 40 | 130 | 12 | 20 | 14 | 15° |
| 50 | 130 | 12 | 20 | 14 | 15° |
| 65 | 130 | 12 | 20 | 14 | 15° |
| 80 | 130 | 12 | 20 | 14 | 15° |
| 100 | 130 | 12 | 20 | 14 | 15° |
| 125 | 130 | 12 | 20 | 14 | 15° |
| 150 | 130 | 12 | 20 | 14 | 15° |
| 200 | 130 | 12 | 25 | 14 | 15° |
| 250 | 130 | 16 | 25 | 22 | 15° |
| 300 | 130 | 16 | 25 | 22 | 15° |
| 350 | 203 | 16 | 25 | 22 | 15° |
| 400 | 203 | 16 | 25 | 22 | 15° |
| 500 | 203 | 16 | 25 | 22 | 15° |
| 600 | 270 | 16 | 25 | 22 | 15° |

Flanges:

Loose Flanges made of RSt 37-2 galvanized yellow plated, drilled according to DIN 2501 PN 10 or 16

Oval Loose Flanges made of RSt 37-2 galvanized yellow plated, drilled according to DIN 2501 PN 10 or 16, with rubber coated tie bars for best noise absorption.

Flange dirlings: PN 6 , PN 10 , PN 16, PN 25 , ASA 150 LBS

Flange materials: RSt 37-2 (AISI C1010), 1.4541 (AISI 321), 1.4571 (AISI 316 Ti), plastic, Aluminium and others. If nessesary, the flanges can be coated with other materials as well.